REV.	DESCRIPTION	DATE
A	RELEASED	04/01/03
B	修改[illegible]	11/03/03

Part Number:WPED-XXXAB3B41W

Dimension Manual

No. of Contacts	DIM 'A'	DIM 'B'	DIM 'C'	DIM 'D'
36	25.00	6.00	9.15	7.65
64	39.00	20.00	23.15	21.65
98	56.00	37.00	40.15	38.65
164	89.00	70.00	73.15	71.65

No. of Contacts	DIM 'E'	DIM 'F'	PIN 'G'
36	6.00	8.15	B17
64	20.00	22.15	B17,B31
98	37.00	39.15	B17,B31 B48
164	70.00	72.15	B17,B31 B48,BB1

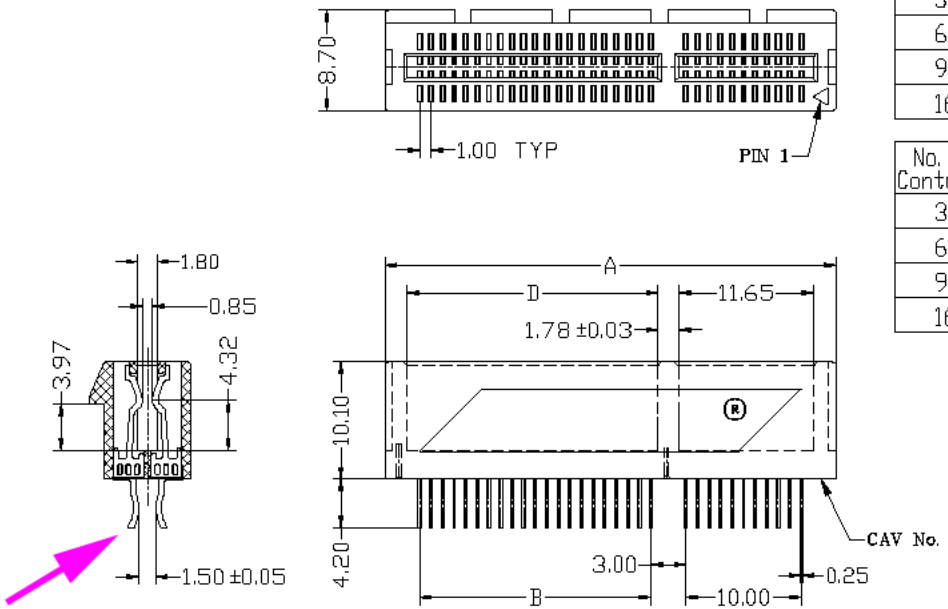

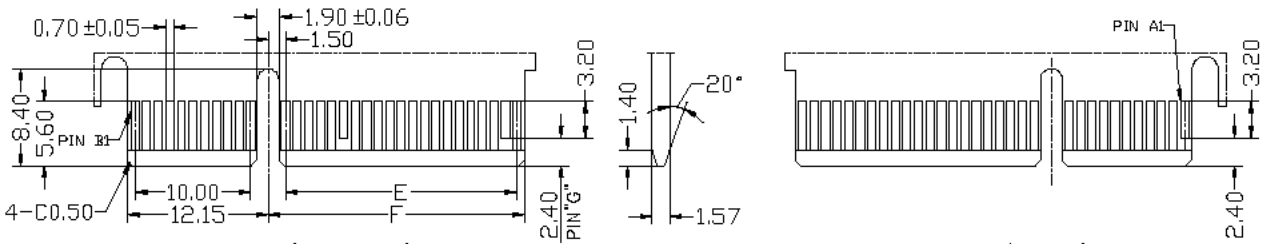

PRIMARY (COMPONENT) SIDE

SECONDARY (SOLDER) SIDE

← I/O PANEL DIRECTION

NOTES

*Material:

Body: PBT,Glass Fiber 30%,
UL 94V-0 Rated. Color: White,Black. CAV. NO.:A~H.

Contacts: Brass.

Plating: Gold Plating Over Nickel on Contact Area; Tin/Lead Plating on Terminal.

*Mechanical:

Insertion Force: 1.15N Max Per Contact Pair;
Withdrawal Force: 0.15N Min Per Contact Pair;
Contact Retention Force: 4.9N Min Per Contact;

*Electrical Specification:

Contact Resistance: 30 Milliohms Max.
Current Resistance: 1.1 Ampere
Insulation Resistance: 1000 Megohms Min, At 500V AC.
Operating Temperature: -55'c to +105'c

*How to order:

WPED-XXX A B 3 B 4 1 _ W

- W: Winning Mark
- 空白: No Mark
- U: Sn Cu(無鉛)
- 空白: Sn Pb(鉛)
- 1: None Posts
- 4: Straddle Type
- B: Brass
- 3: White 1: Black
- B: PBT
- Selective Gole A: Flash B: 5u" C: 10u"
- Number of Contacts
- Series NO.
- PCI Express Connector Loose Piece Pin

檔名 F/Name	C:\3GIO\WPEX\AP\WPED-S.DWG	T E L.		未註入公差 Tolerance Unless Otherwise Specified	設計 Designed	製圖 Drawing	檢圖 Reviewed	承認 Approved	單位 Unit	mm	比例尺 Scale	3:2	Third Angle Projection
品名 P/Name	PCI Express 雙PIN 夾腳型	F A X.		.X ~ ±0.38					日期 Date		11/03/03	Sheet	1 Of 1
公司 CO/Name				.XX ~ ±0.25					圖名 Name		PCI Express 雙PIN夾腳型 承接圖		REV
				.XXX ~ ±0.20					圖號 Drawing No.		WPED-ALLPS-AN-W004		B
				Angle ~ ± 3'									