


5	6	7
△	DESCRIPTION	APPROVER
THIS IS CAD DRAWING. DO NOT REVISE MANUALL Y!!!		

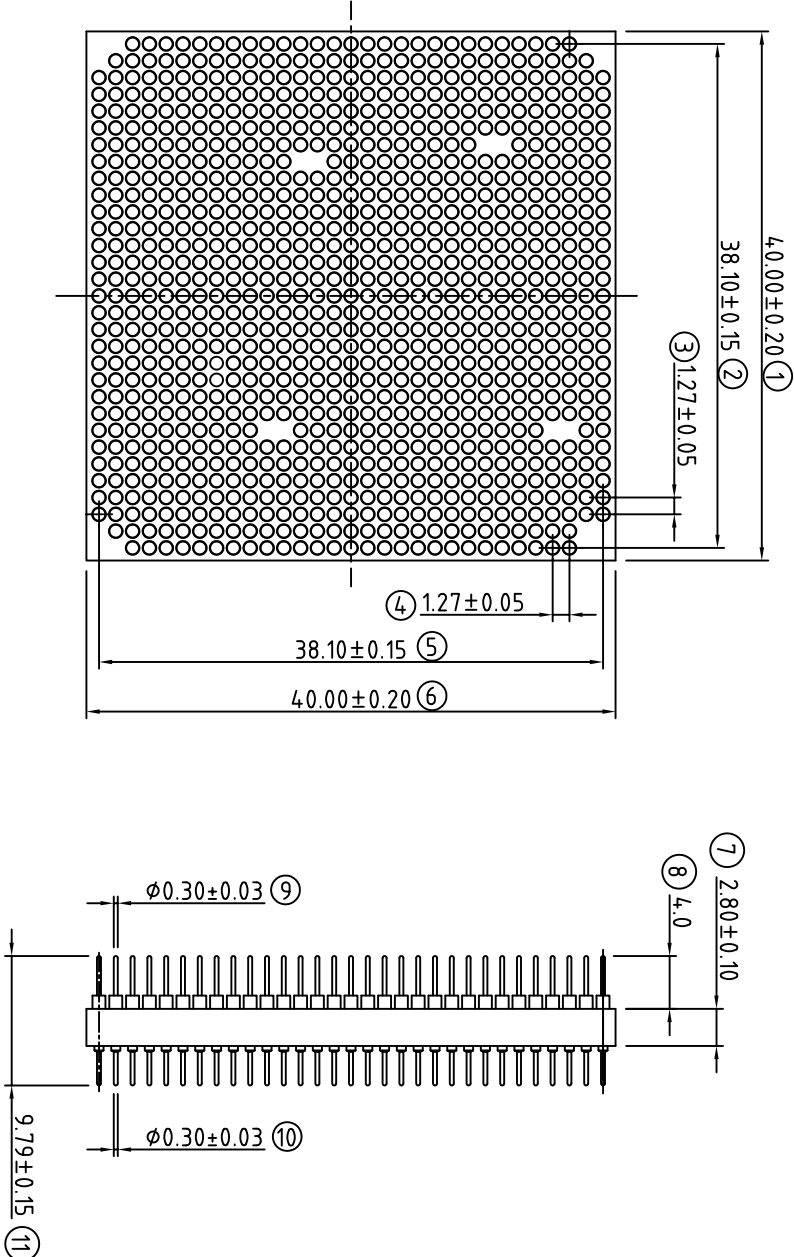

PGA 31x31 CONTACT: 940 Pin FootPrint: 76

S Q A 2 7 6 0 X 004G

Code	Pin plated
0	Tin 200u"
1	Gold 3u"
2	Gold 10u"
3	Gold 30u"

- Technical Data:
- Material : Brass Screw Machined
  - Pin : Tin plated over Brass & Nickel, or 3u"Gold Plated over Brass
  - Plating (Sleeve) : see table on "Pin Plated Code"
  - Special Plating : see table on "Pin Plated Code"
  - Insulator body : FR-4
- Electrical
- Current rating :3Amps/contact max.
  - Contact resistance ≤ 4mΩ /contact
  - Insulation resistance ≥ 1KΩ/r at V=100V
  - Operating Voltage:60 Vac/DC
- Mechanical
- Operating temperature(continuous) : gold plated: -55°C to +125°C
  - Tin plated : -40°C to +105°C
  - Soldering temperature:+260°C, 10s max.
- Ordering information:

**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		SQ-PGA 940P 9.79mm PIN(孔距规格)		DWG NO. : SQ0002-940	
PART NO.	SO2760X004G	CHECKED	DESIGNED	DRAWN	Seamus 2005.11.07
APPROVED			Seamus 2005.11.07		
CUST NO.		SHEET: 01/01		REV.: B	
UNIT: mm		SCALE: NONE		Tolerance	
X: ±0.50		X.X: ±0.30		X.XX: ±0.10	
X°: ±1°					

